


# ASM 18 | ASM 60

## Centrifugal plant

The ASM centrifugal machines are ideal for small parts. With higher processing intensity, they deburr 10-20 times faster than vibratory finishing machines. The centrifugal system can be planned as a stand-alone unit up to a fully automatic system.




ASM 60 with autom. separator

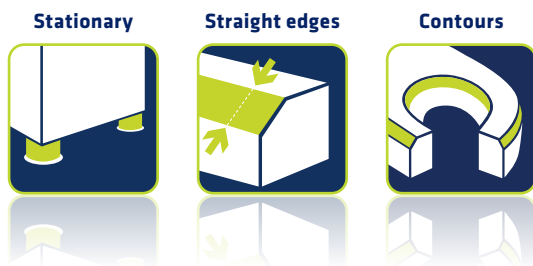


Accessories on request

ASM 18

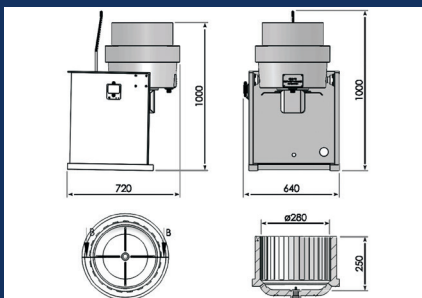

ASM 60

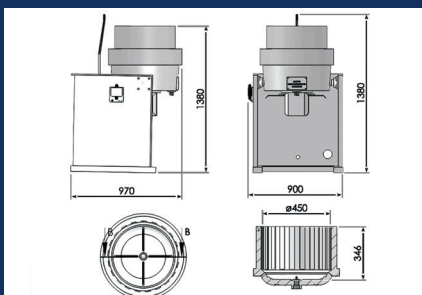

### Features

- ✔️ sturdy, long-life construction with plastic-coated steel tub
- ✔️ Easy emptying through tiltable working tank
- ✔️ Compact device including base frame and manual separation (ASM 18)

### Options

- ✔️ Grinding and polishing media for individual application
- ✔️ Additive (compounds)
- ✔️ Separator
- ✔️ Various opportunities for water treatment (e.g. paper filter)

### Delivery contents

- ✔️ Timer
- ✔️ Dosing pump
- ✔️ Manual sorting sieve (ASM 18)
- ✔️ Controller
- ✔️ Operating manual

### Technical data

	ASM 18	ASM 60
Motor	0,75 kW   1,500 rpm	2,2 kW   1,500 rpm
Energy	400 V, 50-60 Hz	400 V / 50-60 Hz
Dimensions of work tank	Ø 280 x 250 mm	Ø 520 x 346 mm
Dimensions	720 x 640 x 1000 mm	970 x 900 x 1380 mm
Weight	120 kg	380 kg
Item no.	67883	67882